



Right Side View

COMFORTMAX
 Fuel Tank
 1:2 Sheet 1/4
 See Sheet 3 for notes

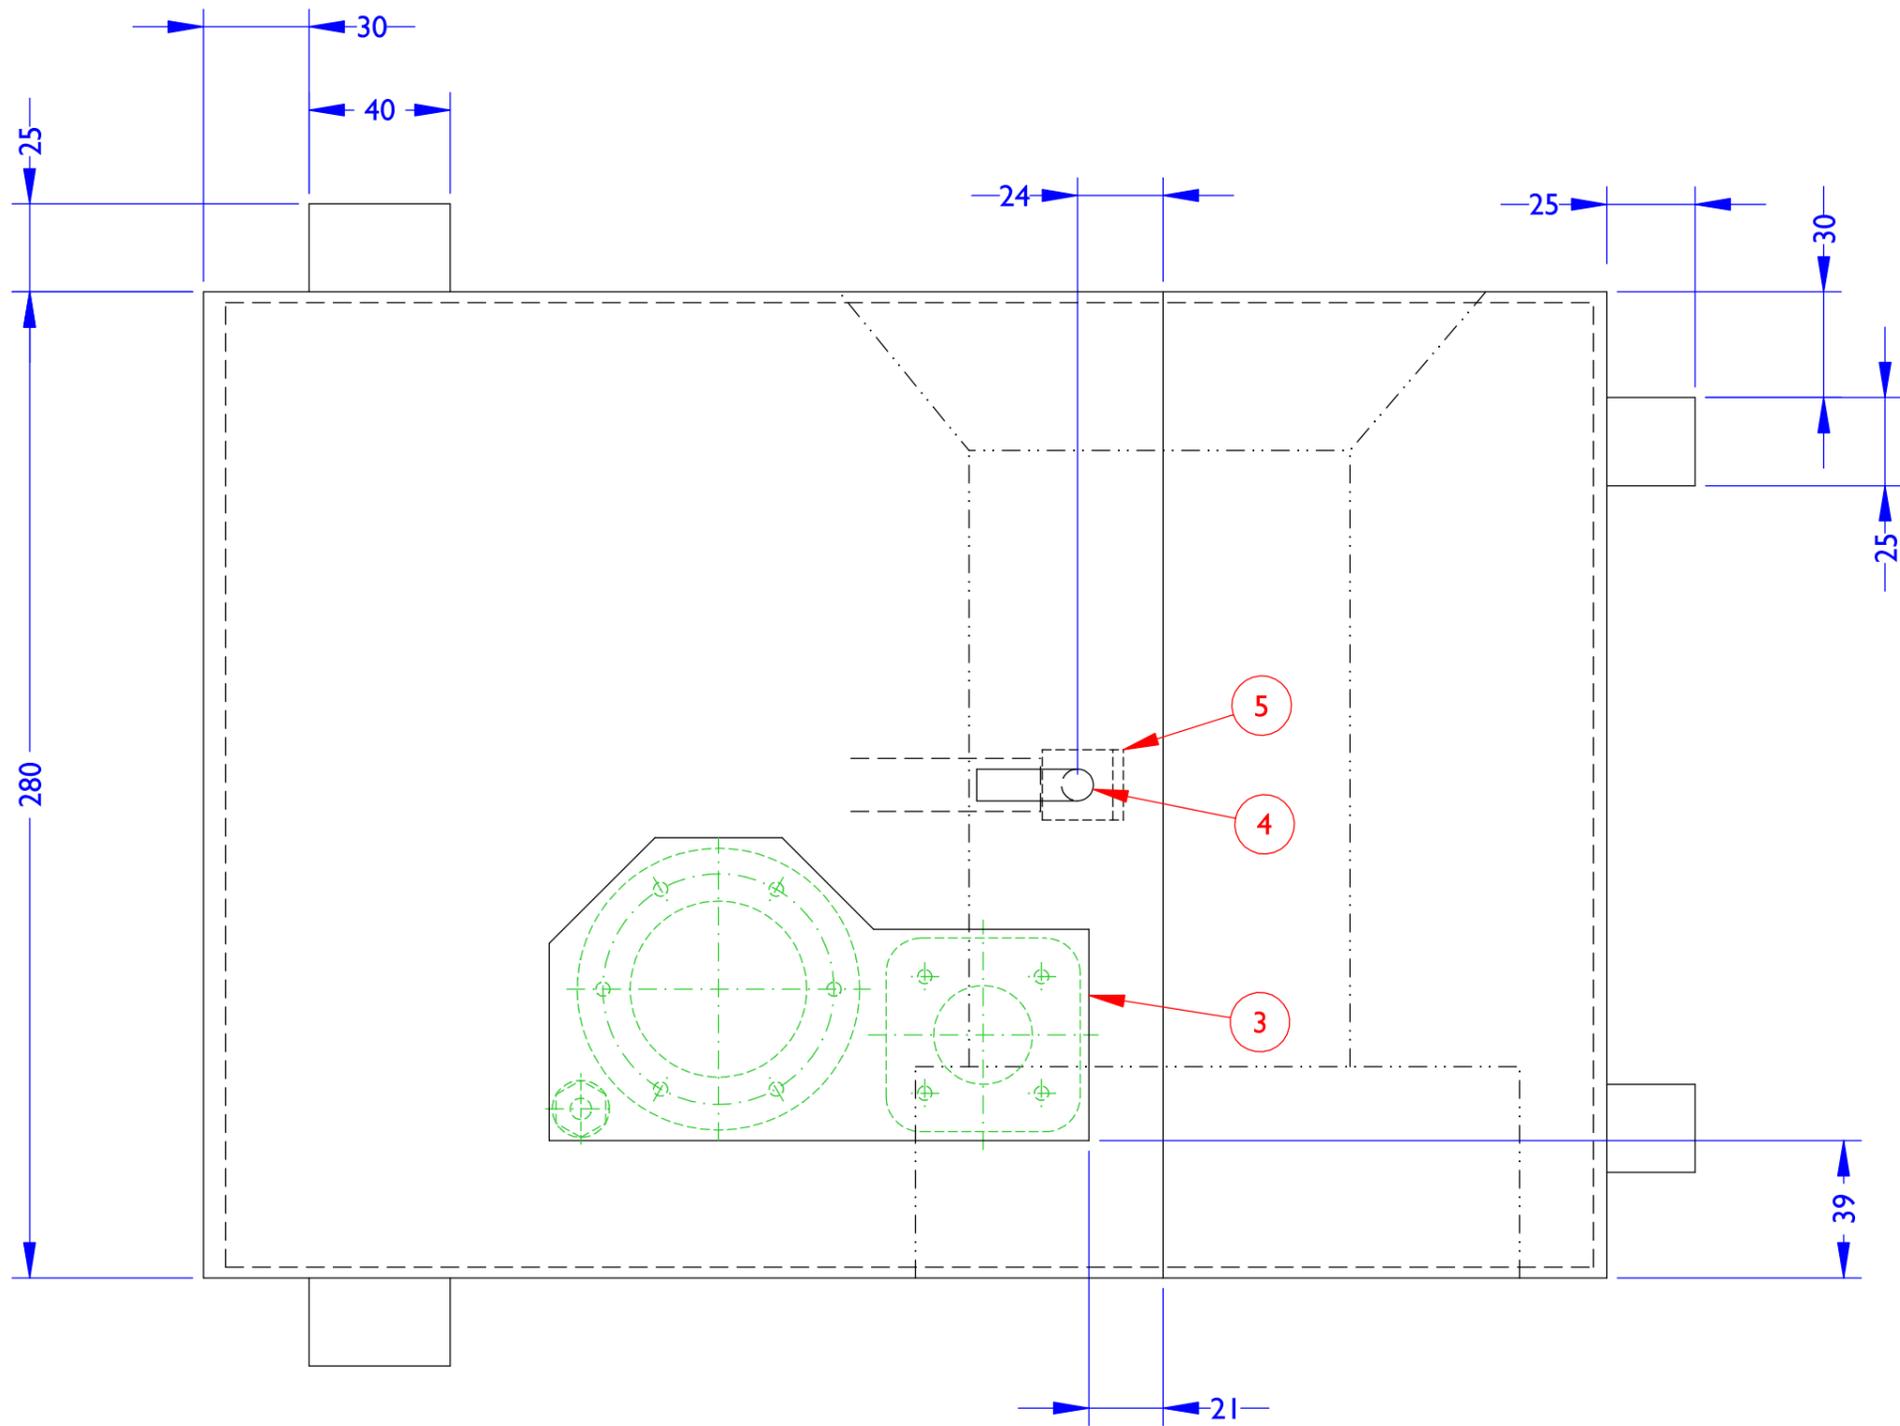

Plan View

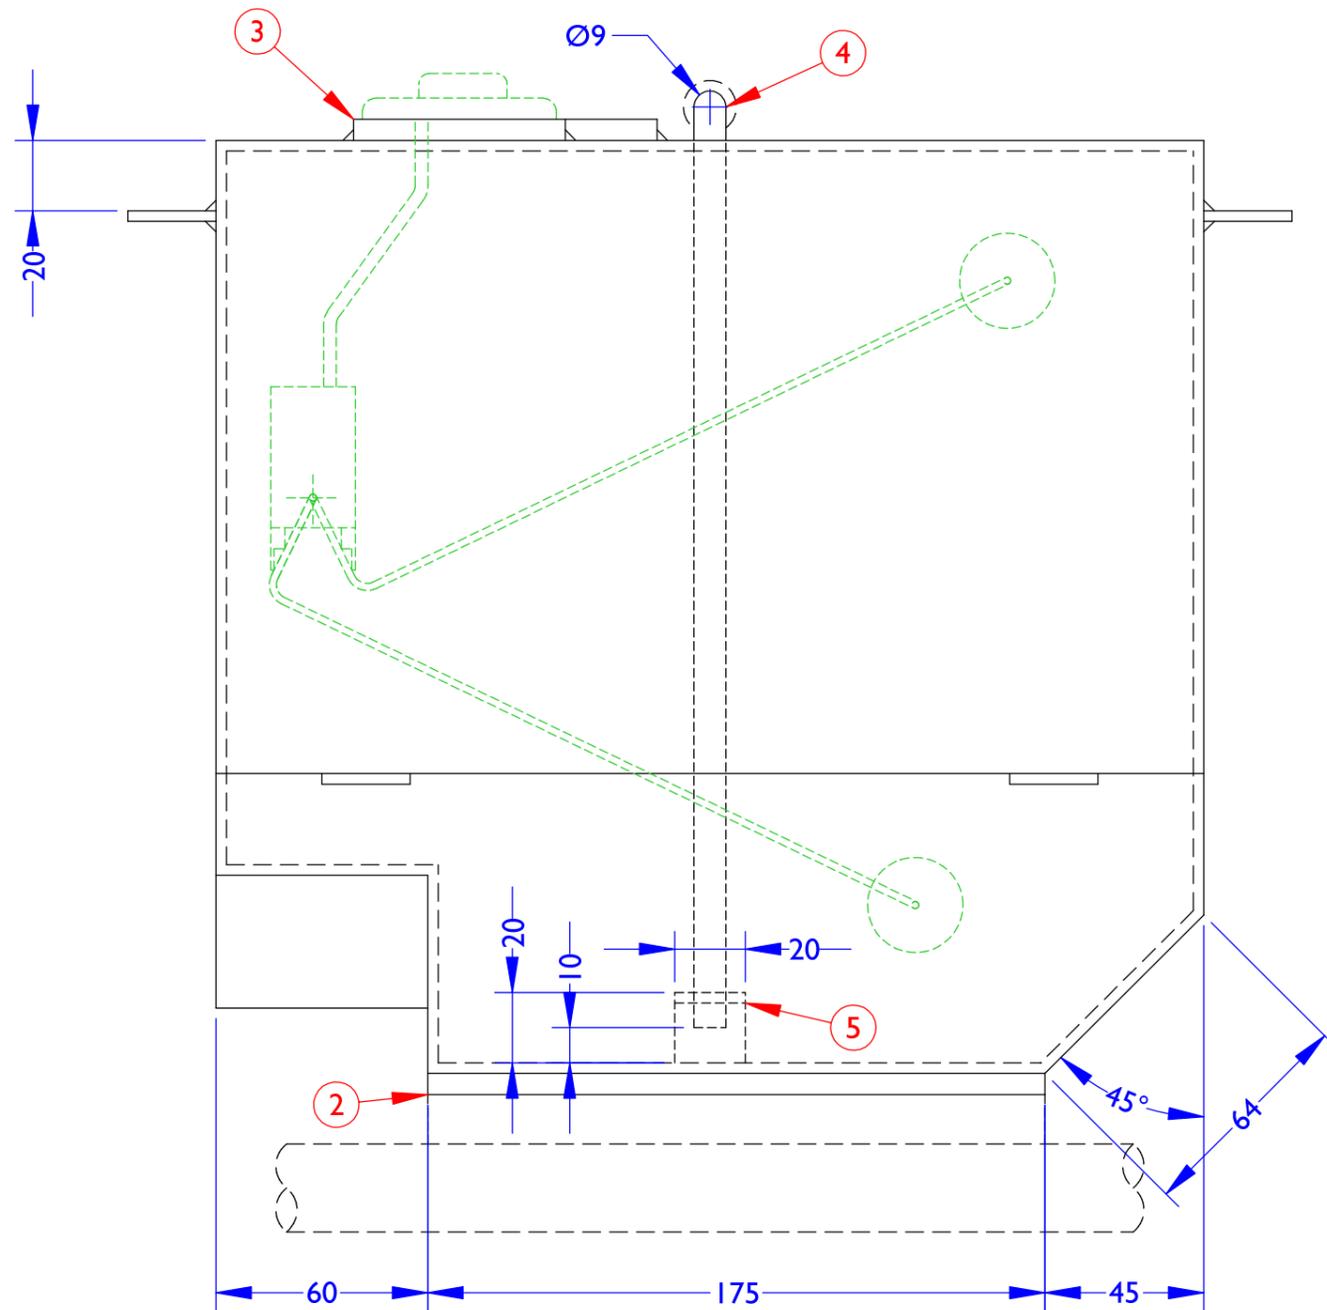

Front View

NOTES

1. All dimensions are to the outside surface of tank. Fittings in green are not included in scope of work. Wall thickness shown as 3mm - to be confirmed.
2. 25 x 6 flat bar doubler fitted full width of underside of tank.
3. 6 thick doubler fitted to top of tank for fittings (see sheet 4).
4. 9 OD pick-up tube fitted on centreline. Top bend of tube to be kept as low as possible.
5. 20 x 20 x 20 angle brace for pick-up tube fitted inside bottom of tank.

